

LUX



SPECIFICATIONS


General characteristics

Model	LUX – KW36LCD
Description	Range hood
Installation	Wall mounted


Design features

Material	304 nickel bearing stainless steel
Volts	120 VAC
Hz	60
Amps	4.3
Suction (Low speed)	200 CFM
Suction (High speed)	870 CFM
Decibels (Low speed)	25DBA
Decibels (High speed)	63DBA
Switch	LCD, 6 speeds with timer
Filters	Baffle / 3 pcs / 8 ^{3/4} ” x 13 ^{3/4} ”
Ducting size	6” round
Lights	2 x GU10 LED 1.5W
Use with gaz cooktop	Allowed by regulation
Compliances	UL 507 and CSA C22.2 N°113-10
Warranty	1 year

Technical drawing (Inches)

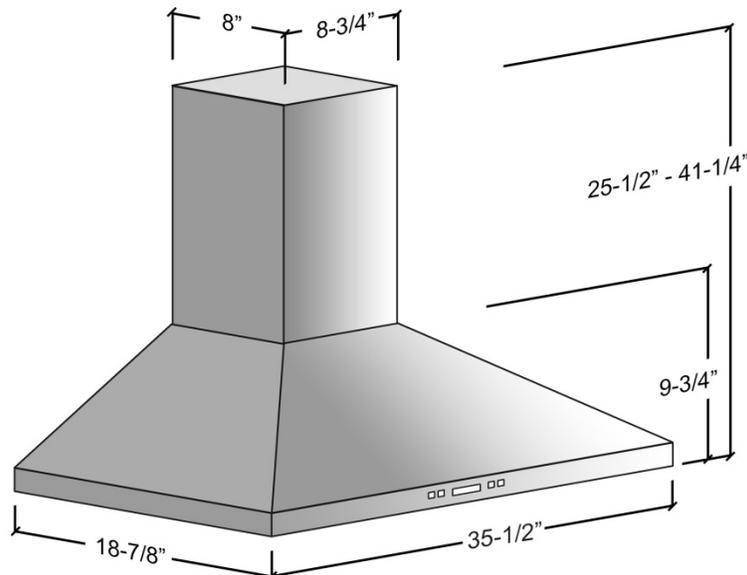

Air flow performance

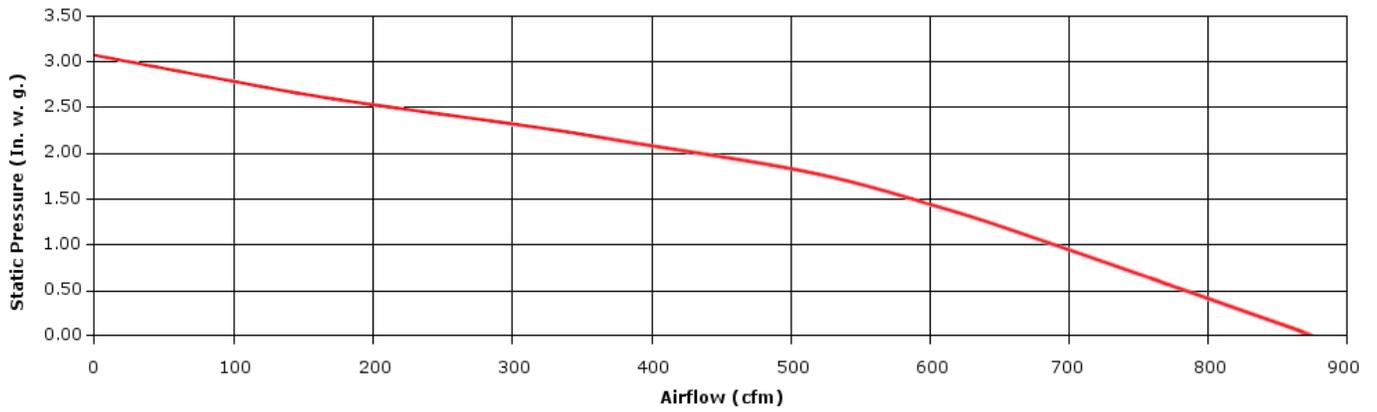

Installation recommended by LUX

- All electrical and building codes in your area must be followed.
- Professional installation is recommended.
- Read and follow carefully the **LUX installation guide**.

